

Relaxation-based revision operators in description logics

Marc Aiguier¹, Jamal Atif², Isabelle Bloch³ and Céline Hudelot¹

1. Centrale Supélec, MAS, France, {marc.aiguier,celine.hudelot}@centralesupelec.fr

2. PSL, Université Paris-Dauphine, LAMSADE, UMR 7243, France, jamal.atif@dauphine.fr

3. Institut Mines-Telecom, Telecom ParisTech, CNRS LTCI, France, isabelle.bloch@telecom-paristech.fr

Abstract

As ontologies and description logics (DLs) reach out to a broader audience, several reasoning services are developed in this context. Belief revision is one of them, of prime importance when knowledge is prone to change and inconsistency. In this paper we address both the generalization of the well-known AGM postulates, and the definition of concrete and well-founded revision operators in different DL families. We introduce a model-theoretic version of the AGM postulates with a general definition of inconsistency, hence enlarging their scope to a wide family of non-classical logics, in particular negation-free DL families. We propose a general framework for defining revision operators based on the notion of relaxation, introduced recently for defining dissimilarity measures between DL concepts. A revision operator in this framework amounts to relax the set of models of the old belief until it reaches the sets of models of the new piece of knowledge. We demonstrate that such a relaxation-based revision operator defines a faithful assignment and satisfies the generalized AGM postulates. Another important contribution concerns the definition of several concrete relaxation operators suited to the syntax of some DLs ($\mathcal{ALC}$ and its fragments $\mathcal{EL}$ and $\mathcal{ELU}$).

Keywords: Revision in DL, AGM theory, relaxation, retraction.

1 Introduction

Belief revision is at the core of artificial intelligence and philosophy questionings. It is defined as the process of changing an agent belief with a new acquired knowledge. Three change operations are usually considered: *expansion*, *contraction* and *revision*. We focus here on the revision, i.e. the process of adding **consistently** the new belief sets. Belief revision has been intensively studied in classical logics (e.g. propositional logic) mostly under the prism of AGM theory [Alchourrón *et al.*, 1985]. With the growing interest in non-classical logics, such as Horn Logics and Description Logics [Baader, 2003], several attempts to generalize AGM theory, making it compliant to the meta-logical flavor of these logics, have been introduced recently [Flouris *et al.*, 2005; Delgrande and Peppas, 2015; Ribeiro *et al.*, 2013; Ribeiro and Wassermann, 2014].

In this paper, we are interested in defining concrete revision operators in Description Logics (DLs). DLs are now pervasive in many knowledge-based representation systems, such as ontological reasoning, semantic web, scene understanding, cognitive robotics, to mention a few. In all these domains, the expert knowledge is rather a flux evolving through time, requiring hence the definition of rational revision operators. Revision is then a cornerstone in ontology engineering life-cycle where the expert knowledge is prone to change and inconsistency. This paper contributes to the effort of defining such rational revision operators, in line with the recent art of the domain [Qi *et al.*, 2006b; Qi *et al.*, 2006a; Flouris *et al.*, 2005; Flouris *et al.*, 2006]. In Section 2 we discuss the adaptation of AGM theory to non-classical logics, including DLs, and introduce, as a first contribution, a model-theoretic rewriting of AGM postulates. In Section 3, we introduce our general framework of relaxation-based revision operators. As a second contribution, we demonstrate that they satisfy the AGM postulates and lead to a faithful assignment. Our third contribution is detailed in Section 4, by providing concrete theory relaxation operators in different DLs (namely $\mathcal{ALC}$ and its fragments $\mathcal{EL}$ and $\mathcal{ELU}$). Section 5 positions our contributions with regards to the literature and finally Section 6 draws some conclusions and perspectives.

2 Preliminaries

2.1 Description Logics

Description logics are a family of knowledge representation formalisms (see e.g. [Baader, 2003] for more details). We consider, in this paper, the logic $\mathcal{ALC}$ and its fragments $\mathcal{EL}$ and $\mathcal{ELU}$. In the following we provide the syntax and semantics of $\mathcal{ALC}$, from which those of $\mathcal{EL}$ and $\mathcal{ELU}$ are easily deducible. Signatures in DLs are triplets (N_C, N_R, I) where N_C , N_R and I are nonempty pairwise disjoint sets such that elements in N_C , N_R and I are *concept names*, *role names* and *individuals*, respectively. Given a signature $\Sigma \in \text{Sign}$, $\text{Sen}(\Sigma)$ contains all the sentences of the form $C \sqsubseteq D$, $x : C$ and $(x, y) : r$ where $x, y \in I$, $r \in N_R$ and C is an $\mathcal{ALC}$ -concept inductively defined from N_C and binary and unary operators in $\{\sqcap, \sqcup, \neg\}$ and in $\{\neg, \forall r., \exists r.\}$, respectively. The set of *concept descriptions* provided by Σ is denoted by $\mathcal{C}(\Sigma)$. The semantics of concept descriptions is defined using interpretations. An *interpretation* $\mathcal{I}$ is a pair $\mathcal{I} = (\Delta_{\mathcal{I}}, \cdot^{\mathcal{I}})$

consisting of an interpretation domain $\Delta_{\mathcal{I}}$ and an interpretation function $\cdot^{\mathcal{I}}$ which maps concepts to subsets of the domain $\Delta_{\mathcal{I}}$ and role names to binary relations on the domain. A concept description C is said to *subsume* a concept description D (denoted by $C \sqsubseteq D$) if $C^{\mathcal{I}} \subseteq D^{\mathcal{I}}$ holds for every interpretation $\mathcal{I}$. Two concepts C and D are *equivalent* (denoted by $C \equiv D$) if both $C \sqsubseteq D$ and $D \sqsubseteq C$ hold. An interpretation $\mathcal{I}$ is a model of a Σ -sentence (TBox or ABox axiom) if it satisfies this sentence (e.g. $\mathcal{I} \models_{\Sigma} (C \sqsubseteq D)$ iff $C^{\mathcal{I}} \subseteq D^{\mathcal{I}}$).

A DL knowledge base T is a set of Σ -sentences (i.e. $T \subseteq \text{Sen}(\Sigma)$). An interpretation $\mathcal{I}$ is a model of a DL knowledge base T if it satisfies every sentence in T . In the following, we use $\text{Mod}(\varphi)$ (or $\text{Mod}(T)$) to denote the set of all the models of a Σ -sentence φ (or DL knowledge base T). A knowledge base is said to be a *theory* if and only if $T = \text{Cn}(T)$, where $\text{Cn}()$ is the consequence operator defined as: $\text{Cn}(T) = \{\varphi \in \text{Sen}(\Sigma) \mid \forall \mathcal{I} \in \text{Mod}(T), \mathcal{I} \models_{\Sigma} \varphi\}$ and satisfying *monotonicity*, *inclusion* and *idempotence*. Hence DLs can be considered as Tarskian logics, i.e. pairs $\langle \Sigma, \text{Cn}() \rangle$.

Classically, consistency of a theory T in DLs is defined as $\text{Mod}(T) \neq \emptyset$. Such a definition raised several issues in adapting revision postulates to Description Logics (see [Ribeiro et al., 2013; Ribeiro and Wassermann, 2014]). We consider in this paper a more general definition of consistency the meaning of which is that there is at least a sentence which is not a semantic consequence: $T \subseteq \text{Sen}(\Sigma)$ is *consistent* if $\text{Cn}(T) \neq \text{Sen}(\Sigma)$.

2.2 AGM theory and Description Logics

AGM theory [Alchourrón et al., 1985] is probably the most influential paradigm in belief revision theory [Gärdenfors, 2003]. It provides, at an abstract logical level, a set of postulates that a revision operator should satisfy so that the old belief is changed minimally and rationally to become consistent with the new one. These postulates require the logic to be closed under negation and usual propositional connectives ($\vee, \wedge, \implies, \neg$) which prevents its use in many non-classical logics, including DLs. Indeed, many DLs do not allow for negation of concepts (e.g. $\mathcal{EL}$) and a *fortiori* disjunction between TBox and ABox sentences is not defined in all DLs. Recently, many papers have addressed the adaptation of AGM theory to non-classical logics, e.g. [Flouris et al., 2005; Ribeiro et al., 2013; Delgrande and Peppas, 2015; Ribeiro and Wassermann, 2014]. The first efforts concentrated on the adaptation of contraction postulates, but more recently, [Ribeiro and Wassermann, 2014] discussed the adaptation of revision postulates and introduced new minimality criteria, not necessarily related to the contraction operator, throwing out the need for negation. However, one can find in [Qi et al., 2006b] an attempt to adapt the AGM revision postulates to DL in a model-theoretic way, following the seminal work of [Katsuno and Mendelzon, 1991] that translated the AGM postulates in propositional logic semantics. The translation in [Qi et al., 2006b] is provided with the classical notion of consistency (a theory T is consistent if $\text{Mod}(T) \neq \emptyset$) which is not adequate to revision purposes (see [Flouris et al., 2006] for a discussion). In this paper we consider a model-theoretic translation of AGM postulates,

similar to the ones in [Qi et al., 2006b], with the notable difference that consistency is defined through the consequence operator as introduced in the previous section. This translation is in accordance with the postulates as introduced in [Ribeiro and Wassermann, 2014].

Given two knowledge bases $T, T' \subseteq \text{Sen}(\Sigma)$, $T \circ T'$ denotes the revision of the old belief T by the new one T' . The model-theoretic translation of AGM postulates writes:

- (G1) $\text{Mod}(T \circ T') \subseteq \text{Mod}(T')$.
- (G2) If $T \cup T'$ is consistent, then $T \circ T' = T \cup T'$.
- (G3) If T' is consistent, then so is $T \circ T'$.
- (G4) If $\text{Mod}(T_1) = \text{Mod}(T'_1)$ and $\text{Mod}(T_2) = \text{Mod}(T'_2)$, then $\text{Mod}(T_1 \circ T_2) = \text{Mod}(T'_1 \circ T'_2)$.
- (G5) $\text{Mod}(T \circ T') \cap \text{Mod}(T'') \subseteq \text{Mod}(T \circ (T' \cup T''))$.
- (G6) If $T \cup T' \cup T''$ is consistent, then $T \circ (T' \cup T'') = (T \circ T') \cup T''$.

Besides these postulates, we consider a minimality criterion introduced in [Ribeiro and Wassermann, 2014]:

(Relevance) If $\varphi \in T \setminus (T \circ T')$, then there exists X , $T \cap (T \circ T') \subseteq X \subseteq T$, such that $\text{Cn}(X \cup T') \neq \text{Sen}(\Sigma)$ and $\text{Cn}(X \cup \{\varphi\} \cup T') = \text{Sen}(\Sigma)$.

A classical construction in belief theory is to characterize the revision operator in terms of *faithful assignments* [Katsuno and Mendelzon, 1991; Grove, 1988]. We provide here a similar representation theorem for the postulates defined above. The proof can be found in [Aiguier et al., 2015].

Definition 1 (Faithful assignment) Let $T \subseteq \text{Sen}(\Sigma)$ be a knowledge base. Let $\preceq_T \subseteq \text{Mod}(\Sigma) \times \text{Mod}(\Sigma)$ be a total pre-order. $\preceq_T$ is a faithful assignment (FA) if the following three conditions are satisfied:

1. If $\mathcal{I}, \mathcal{I}' \in \text{Mod}(T)$, $\mathcal{I} \not\prec_T \mathcal{I}'$.
2. For every $\mathcal{I} \in \text{Mod}(T)$ and every $\mathcal{I}' \in \text{Mod}(\Sigma) \setminus \text{Mod}(T)$, $\mathcal{I} \prec_T \mathcal{I}'$.
3. For every $T' \subseteq \text{Sen}(\Sigma)$, if $\text{Mod}(T) = \text{Mod}(T')$, then $\preceq_T = \preceq_{T'}$.

Theorem 1 A revision operator $\circ$ satisfies the postulates (G1)-(G6) if and only if for any DL knowledge base T , there exists a well-founded (i.e. the min is well defined) FA $\preceq_T$ such that $\text{Mod}(T \circ T') = \min(\text{Mod}(T') \setminus M^*, \preceq_T)$, with $M^* = \{\mathcal{I} \in \text{Mod}(\Sigma) \mid \{\varphi \in \text{Sen}(\Sigma) \mid \mathcal{I} \models_{\Sigma} \varphi\} = \text{Sen}(\Sigma)\}$.

3 Relaxation of theories and associated revision operator

The notion of relaxation has been introduced in [Distel et al., 2014b; Distel et al., 2014c] to define dissimilarity measures between DL concept descriptions. In this paper we generalize this notion to formula relaxation and subsequently to theory relaxation in order to define revision operators.




Figure 1: Relaxations of T until it becomes consistent with T' .

Definition 2 (Concept Relaxation [Distel et al., 2014c]) A (concept) relaxation is an operator $\rho: \mathcal{C}(\Sigma) \rightarrow \mathcal{C}(\Sigma)$ that satisfies the following two properties¹ for all $C \in \mathcal{C}(\Sigma)$.

1. ρ is extensive, i.e. $C \sqsubseteq \rho(C)$,
2. ρ is exhaustive, i.e. $\exists k \in \mathbb{N}_0: T \sqsubseteq \rho^k(C)$,

where ρ^k denotes ρ applied k times, and ρ^0 is the identity mapping.

Our idea to define revision operators is to relax the set of models of the old belief until it becomes consistent with the new pieces of knowledge. This is illustrated in Figure 1 where theories are represented as sets of their models. Intermediate steps to define the revision operators are then the definition of formula and theory relaxations. The whole scheme of our framework is provided in Figure 2.

Definition 3 (Formula Relaxation) Given a signature $\Sigma \in \text{Sign}$, a Σ -formula relaxation is a mapping $\rho_\Sigma: \text{Sen}(\Sigma) \rightarrow \text{Sen}(\Sigma)$ satisfying the following properties:

- *Extensivity*: $\forall \varphi \in \text{Sen}(\Sigma), \text{Mod}(\varphi) \subseteq \text{Mod}(\rho_\Sigma(\varphi))$.
- *Exhaustivity*: $\exists k \in \mathbb{N}, \text{Mod}(\rho_\Sigma^k(\varphi)) = \text{Mod}(\Sigma)$, where ρ_Σ^k denotes ρ_Σ applied k times, and ρ_Σ^0 is the identity mapping.

Definition 4 (Σ -theory relaxation) Let T be a theory, $T \in \mathcal{P}(\text{Sen}(\Sigma))$, ρ_Σ a Σ -formula relaxation and a set $\mathcal{K} = \{k_\varphi \in \mathbb{N} \mid \varphi \in T\}$. Then a Σ -theory relaxation is a mapping $\rho^\mathcal{K}: \mathcal{P}(\text{Sen}(\Sigma)) \rightarrow \mathcal{P}(\text{Sen}(\Sigma))$ defined as:

$$\rho^\mathcal{K}(T) = \bigcup_{\varphi \in T} \rho_\Sigma^{k_\varphi}(\varphi).$$

Proposition 1 $\rho^\mathcal{K}$ is extensive ($\forall T \subseteq \text{Sen}(\Sigma), \text{Mod}(T) \subseteq \text{Mod}(\rho^\mathcal{K}(T))$), and exhaustive ($\exists \mathcal{K} \subseteq \mathbb{N}, \text{Mod}(\rho^\mathcal{K}(T)) = \text{Mod}(\Sigma)$).

Definition 5 (Relaxation-based revision) Let $\rho^\mathcal{K}$ be a Σ -theory relaxation. We define the revision operator $\circ: \mathcal{P}(\text{Sen}(\Sigma)) \times \mathcal{P}(\text{Sen}(\Sigma)) \rightarrow \mathcal{P}(\text{Sen}(\Sigma))$ as follows:

$$T_1 \circ T_2 = \rho^\mathcal{K}(T_1') \cup T_1'' \cup T_2$$

for a set $\mathcal{K}$ such that $\rho^\mathcal{K}(T_1') \cup T_1'' \cup T_2$ is consistent, and $\forall \mathcal{K}'$ s.t. $\rho^{\mathcal{K}'}(T_1') \cup T_1'' \cup T_2$ is consistent, $\sum_{k \in \mathcal{K}} k \leq \sum_{k \in \mathcal{K}'} k$, and $T_1 = T_1' \sqcup T_1''$ (disjoint union) such that:

¹The non-decreasingness property in the original definition is removed here, since it is not needed in our construction.

1. $Cn(T_1' \cup T_2) = \text{Sen}(\Sigma)$,
2. $Cn(T_1'' \cup T_2) \neq \text{Sen}(\Sigma)$,
3. $\forall T$ s.t. $T_1'' \subset T \subseteq T_1, Cn(T \cup T_2) = \text{Sen}(\Sigma)$.

Partitioning T_1 into T_1' and T_1'' is not unique and the only constraint is that T_1'' is of maximal size. The set $\mathcal{K}$ may not be unique either.

Theorem 2 From any Σ -theory relaxation $\rho^\mathcal{K}$ and every knowledge base $T \subseteq \text{Sen}(\Sigma)$, the binary relation $\preceq_T \subseteq \text{Mod}(\Sigma) \times \text{Mod}(\Sigma)$ defined by $\mathcal{I} \preceq_T \mathcal{I}'$ if:

$$\min_{\mathcal{K} \mid \mathcal{I} \in \text{Mod}(\rho^\mathcal{K}(T))} \sum_{k \in \mathcal{K}} k \leq \min_{\mathcal{K}' \mid \mathcal{I}' \in \text{Mod}(\rho^{\mathcal{K}'}(T))} \sum_{k \in \mathcal{K}'} k$$

is a well-founded faithful assignment such that for every $T' \subseteq \text{Sen}(\Sigma)$, $\text{Mod}(T \circ T') = \min(\text{Mod}(T') \setminus M^*, \preceq_T)$.

Proof: By construction, $\preceq_T$ is obviously a total pre-order. Well-foundedness follows from exhaustivity. The two first conditions follow from the fact that $\mathcal{I} \in \text{Mod}(T) \iff \min_{\mathcal{K} \mid \mathcal{I} \in \text{Mod}(\rho^\mathcal{K}(T))} \sum_{k \in \mathcal{K}} k = 0$. The third one is obvious.

It remains to show that $\text{Mod}(T \circ T') = \min(\text{Mod}(T') \setminus M^*, \preceq_T)$. To simplify the proof, we suppose that $T \circ T' = \rho^\mathcal{K}(T) \cup T'$ (i.e. if $T = T_1 \sqcup T_2$, then $T_2 = \emptyset$), the more general case where $T_2 \neq \emptyset$ being easily obtained from this more simple case.

(i) Let $\mathcal{I} \in \text{Mod}(T \circ T')$. By definition of $\circ$, there exists a set $\mathcal{K} \subset \mathbb{N}$ such that $\mathcal{I} \in \text{Mod}(\rho^\mathcal{K}(T) \cup T')$, and then $\mathcal{I} \in \text{Mod}(T')$. Let $\mathcal{I}' \in \text{Mod}(T')$. If $\mathcal{I}' \in \text{Mod}(\rho^\mathcal{K}(T))$, then $\mathcal{I} \not\preceq_T \mathcal{I}'$ and $\mathcal{I}' \not\preceq_T \mathcal{I}$. Otherwise $\mathcal{I}' \notin \text{Mod}(\rho^\mathcal{K}(T))$ and $\forall \mathcal{K}'$ such that $\mathcal{I}' \in \text{Mod}(\rho^{\mathcal{K}'}(T))$ we have $\sum_{k \in \mathcal{K}'} k \geq \sum_{k \in \mathcal{K}} k$. Then $\min_{\mathcal{K}' \mid \mathcal{I}' \in \text{Mod}(\rho^{\mathcal{K}'}(T))} \sum_{k \in \mathcal{K}'} k \geq \sum_{k \in \mathcal{K}} k$, which implies $\mathcal{I} \preceq_T \mathcal{I}'$. We can hence conclude that $\mathcal{I} \in \min(\text{Mod}(T') \setminus M^*, \preceq_T)$.

(ii) Conversely, let $\mathcal{I} \in \min(\text{Mod}(T') \setminus M^*, \preceq_T)$. By definition of $\circ$, there exists a set $\mathcal{K}$ of minimal sum such that $\rho^\mathcal{K}(T) \cup T'$ is consistent and $T \circ T' = \rho^\mathcal{K}(T) \cup T'$. As $\mathcal{I} \in \min(\text{Mod}(T') \setminus M^*, \preceq_T)$, this means that, for every $\mathcal{I}' \in \text{Mod}(\rho^\mathcal{K}(T) \cup T')$, $\mathcal{I} \preceq_T \mathcal{I}'$, and then $\mathcal{I} \in \text{Mod}(\rho^\mathcal{K}(T) \cup T') = \mathcal{I} \in \text{Mod}(T \circ T')$. $\square$

Proposition 2 The revision in Definition 5 satisfies the **Relevance minimality criterion**.

The proof is direct by setting $X = T_1''$.

4 Concrete theory relaxations in different $\mathcal{ALC}$ fragments

In this section, we introduce concrete relaxation operators suited to the syntax of the logic $\mathcal{ALC}$, as defined in Section 2.1, and its fragments $\mathcal{EL}$ and $\mathcal{ELU}$. $\mathcal{EL}$ -concept description constructors are existential restriction ($\exists$), conjunction ($\sqcap$), $\top$ and $\perp$, while $\mathcal{ELU}$ -concept constructors are those of $\mathcal{EL}$ enriched with disjunction ($\sqcup$).

Formulas in DL are of the GCI form: $C \sqsubseteq D$, where C and D are any two complex concepts, or Abox assertions: $(a : C, \langle a, b \rangle : r)$, with r a role. We propose to define a Σ -formula relaxation in two ways (other definitions may also

exist). For GCIs, a first approach consists in relaxing the set of models of D while another one amounts to “retract” the set of models of C .

Definition 6 Let C and D be any two complex concepts defined over the signature Σ . The concept relaxation based Σ -formula relaxation, denoted ${}^r\rho_\Sigma$ is defined as follows:

$${}^r\rho_\Sigma(C \sqsubseteq D) \equiv C \sqsubseteq \rho(D)$$

$${}^r\rho_\Sigma(a : C) \equiv a : \rho(C), \quad {}^r\rho_\Sigma(\langle a, b \rangle : r) \equiv \langle a, b \rangle : r_\top$$

where $r_\top^\top = \Delta^\top \times \Delta^\top$ and ρ is a concept relaxation as in Definition 2.

Proposition 3 ${}^r\rho_\Sigma$ is a Σ -formula relaxation, that is extensive and exhaustive.

The proof directly follows from the extensivity and exhaustivity of ρ .

Definition 7 (Concept Retraction) A (concept) retraction is an operator $\kappa : \mathcal{C}(\Sigma) \rightarrow \mathcal{C}(\Sigma)$ that satisfies the following three properties for all $C, D \in \mathcal{C}(\Sigma)$.

1. κ is anti-extensive, i.e. $\kappa(C) \sqsubseteq C$, and
2. κ is exhaustive, i.e. $\forall D \in \mathcal{C}(\Sigma), \exists k \in \mathbb{N} \mid \kappa^k(C) \sqsubseteq D$, where κ^k denotes κ applied k times, and κ^0 is the identity mapping.

Definition 8 Let C and D be any two complex concepts defined over the signature Σ . The concept retraction based Σ -formula relaxation, denoted ${}^c\rho_\Sigma$ is defined as follows:

$${}^c\rho_\Sigma(C \sqsubseteq D) \equiv \kappa(C) \sqsubseteq D$$

where κ is a concept retraction.

The definition for Abox assertions is similar as in Definition 6.

Proposition 4 ${}^c\rho_\Sigma$ is a Σ -formula relaxation..

For coming up with revision operators, it remains to define concrete relaxation and retraction operators at the concept level (cf. Figure 2). Some examples of retraction and relaxation operators are given below.

4.1 Relaxation and retraction in $\mathcal{EL}$

$\mathcal{EL}$ -Concept Retractions. A trivial concept retraction is the operator $\kappa_\perp$ that maps every concept to $\perp$. This operator is particularly interesting for debugging ontologies expressed in $\mathcal{EL}$ [Schlobach et al., 2007]. Let us illustrate this operator through the following example adapted from [Qi et al., 2006b] to restrict the language to $\mathcal{EL}$.

Example 1 Let $T = \{\text{TWEETY} \sqsubseteq \text{BIRD}, \text{BIRD} \sqsubseteq \text{FLIES}\}$ and $T' = \{\text{TWEETY} \sqcap \text{FLIES} \sqsubseteq \perp\}$. Clearly $T \cup T'$ is inconsistent. The retraction-based Σ -formula relaxation amounts to apply $\kappa_\perp$ to the concept TWEETY resulting in the following new knowledge base $\{\perp \sqsubseteq \text{BIRD}, \text{BIRD} \sqsubseteq \text{FLIES}\}$ which is now consistent with T' . An alternative solution is to retract the concept BIRD in $\text{BIRD} \sqsubseteq \text{FLIES}$ which results in the following knowledge base $\{\text{TWEETY} \sqsubseteq \text{BIRD}, \perp \sqsubseteq \text{FLIES}\}$ which is also consistent with T' . The sets of minimal sum $\mathcal{K}_1$ and $\mathcal{K}_2$ in Definition 5 are $\mathcal{K}_1 = \{1, 0\}$, (i.e. $k_{\varphi_1} = 1, k_{\varphi_2} = 0$, where $\varphi_1 = \text{TWEETY} \sqsubseteq \text{BIRD}, \varphi_2 = \text{BIRD} \sqsubseteq \text{FLIES}$) and $\mathcal{K}_2 = \{0, 1\}$. A good final solution could be $T \circ T' = \{\perp \sqsubseteq \text{BIRD}, \text{BIRD} \sqsubseteq \text{FLIES}, \text{TWEETY} \sqcap \text{FLIES} \sqsubseteq \perp\}$ based on an additional preference relation among the solutions defined from the minimality of the “size” of the modified concepts.

$\mathcal{EL}$ -Concept Relaxations. A trivial relaxation is the operator $\rho_\top$ that maps every concept to $\top$. Other non-trivial $\mathcal{EL}$ -concept description relaxations have been introduced in [Distel et al., 2014b]. We summarize here some of these operators.

$\mathcal{EL}$ concept descriptions can appropriately be represented as labeled trees, often called $\mathcal{EL}$ description trees [Baader et al., 1999]. An $\mathcal{EL}$ description tree is a tree whose nodes are labeled with sets of concept names and whose edges are labeled with role names. An $\mathcal{EL}$ concept description

$$C \equiv P_1 \sqcap \dots \sqcap P_n \sqcap \exists r_1.C_1 \sqcap \dots \sqcap \exists r_m.C_m \quad (1)$$

with $P_i \in \mathcal{N}_C \cup \{\top\}$, can be translated into a description tree by labeling the root node v_0 with $\{P_1, \dots, P_n\}$, creating an r_j successor, and then proceeding inductively by expanding C_j for the r_j -successor node for all $j \in \{1, \dots, m\}$.

An $\mathcal{EL}$ -concept description relaxation then amounts to apply simple tree operations. Two relaxations can hence be defined [Distel et al., 2014b]: (i) ρ_{depth} that reduces the role depth of each concept by 1, simply by pruning the description tree, and (ii) ρ_{leaves} that removes all leaves from a description tree.

4.2 Relaxations in $\mathcal{ELU}$

The relaxation defined above exploits the strong property that an $\mathcal{EL}$ concept description is isomorphic to a description tree. This is arguably not true for more expressive DLs. Let us try to go a one step further in expressivity and consider the logic $\mathcal{ELU}$. A relaxation operator as introduced in [Distel et al., 2014b] requires a concept description to be in a special normal form, called normal form with grouping of existentials, defined recursively as follows.

Definition 9 We say that an $\mathcal{EL}$ -concept D is written in normal form with grouping of existential restrictions if it is of the form

$$D = \bigcap_{A \in N_D} A \sqcap \bigcap_{r \in N_R} D_r, \quad (2)$$

where $N_D \subseteq \mathcal{N}_C$ is a set of concept names and the concepts D_r are of the form

$$D_r = \bigcap_{E \in \mathcal{C}_{D_r}} \exists r.E, \quad (3)$$

where no subsumption relation holds between two distinct conjuncts and $\mathcal{C}_{D_r}$ is a set of complex $\mathcal{EL}$ -concepts that are themselves in normal form with grouping of existential restrictions.

The purpose of D_r terms is simply to group existential restrictions that share the same role name. For an $\mathcal{ELU}$ -concept C we say that C is in normal form if it is of the form ($C \equiv C_1 \sqcup C_2 \sqcup \dots \sqcup C_k$) and each of the C_i is an $\mathcal{EL}$ -concept in normal form with grouping of existential restrictions.

Definition 10 [Distel et al., 2014b] Given an $\mathcal{ELU}$ -concept description C we define an operator ρ_e recursively as follows. For $C = A \in \mathcal{N}_C$ and for $C = \top$ we define $\rho_e(A) = \rho_e(\top) = \top$. For $C = D_r$, where D_r is a group of existential restrictions as in (3), we need to distinguish two cases:

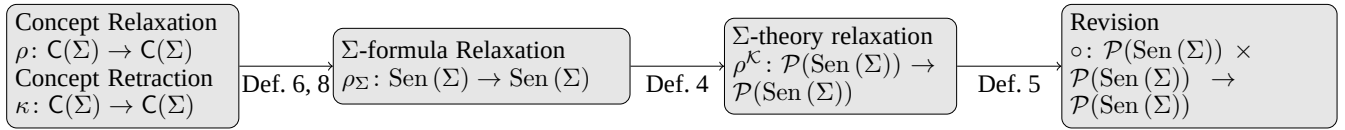


Figure 2: From concept relaxation and retraction to revision operators in DL.

- if $D_r \equiv \exists r. \top$ we define $\rho_e(D_r) = \top$, and
- if $D_r \not\equiv \exists r. \top$ then we define $\rho_e(D_r) = \bigsqcup_{S \subseteq C_{D_r}} \left(\bigcap_{E \notin S} \exists r. E \sqcap \exists r. \rho_e \left(\bigcap_{F \in S} F \right) \right)$.

Notice that in the latter case $\top \notin C_{D_r}$ since D_r is in normal form. For $C = D$ as in (2) we define $\rho_e(D) = \bigsqcup_{G \in C_D} \left(\rho_e(G) \sqcap \bigcap_{H \in C_D \setminus G} H \right)$, where $C_D = N_D \cup \{D_r \mid r \in \mathcal{N}_R\}$. Finally for $C = C_1 \sqcup C_2 \sqcup \dots \sqcup C_k$ we set $\rho_e(C) = \rho_e(C_1) \sqcup \rho_e(C_2) \sqcup \dots \sqcup \rho_e(C_k)$.

The proof of ρ_e being a relaxation, i.e. satisfying exhaustivity and extensivity is detailed in [Distel et al., 2014a].

Let us illustrate this operator on an example.

Example 2 Suppose an agent believes that a person BOB is married to a female judge: $T = \{\text{BOB} \sqsubseteq \text{MALE} \sqcap \exists \text{MARRIEDTO. (FEMALE} \sqcap \text{JUDGE)}\}$. Suppose now that due to some obscurantist law, it happens that females are not allowed to be judges. This new belief is captured as $T' = \{\text{JUDGE} \sqcap \text{FEMALE} \sqsubseteq \perp\}$. By applying ρ_e one can resolve the conflict between the two belief sets. To ease the reading, let us rewrite the concepts as follows: $A \equiv \text{MALE}$, $B \equiv \text{FEMALE}$, $C \equiv \text{JUDGE}$, $m \equiv \text{MARRIEDTO}$, $D \equiv \exists \text{MARRIEDTO. (FEMALE} \sqcap \text{JUDGE)}$. Hence $\rho_e(A \sqcap D) \equiv (\rho_e(A) \sqcap D) \sqcup (A \sqcap \rho_e(D))$, with $\rho_e(A) \equiv \top$ and

$$\begin{aligned} \rho_e(D) &\equiv \exists m. \rho_e(B \sqcap C) \sqcup (\exists m. B \sqcap \exists m. \rho_e(C)) \sqcup \\ &\quad (\exists m. \rho_e(B) \sqcap \exists m. C) \\ &\equiv \exists m. (B \sqcup C) \sqcup (\exists m. B \sqcap \exists m. \top) \sqcup (\exists m. \top \sqcap \exists m. C) \\ &\equiv \exists m. B \sqcup \exists m. C \sqcup \exists m. (B \sqcup C) \equiv \exists m. B \sqcup \exists m. C \end{aligned}$$

Then

$$\begin{aligned} \rho_e(A \sqcap D) &\equiv (\rho_e(A) \sqcap D) \sqcup (A \sqcap \rho_e(D)) \\ &\equiv (\top \sqcap D) \sqcup (A \sqcap (\exists m. B \sqcup \exists m. C)) \\ &\equiv D \sqcup (A \sqcap (\exists m. B \sqcup \exists m. C)) \end{aligned}$$

The new agent's belief, up to a rewriting, becomes

$$\begin{aligned} \{\text{BOB} \sqsubseteq \exists \text{MARRIEDTO. (FEMALE} \sqcap \text{JUDGE)} \sqcup \\ (\text{MALE} \sqcap (\exists \text{MARRIED. FEMALE} \sqcup \exists \text{MARRIED. JUDGE})), \\ \text{JUDGE} \sqcap \text{FEMALE} \sqsubseteq \perp\}. \end{aligned}$$

Another possibility for defining a relaxation in $\mathcal{ELU}$ is obtained by exploiting the disjunction constructor by augmenting a concept description with a set of exceptions.

Definition 11 Given an exception set $\mathcal{E} = \{E_1, \dots, E_n\}$, we define a relaxation of degree k of an $\mathcal{ELU}$ -concept description C as follows: for a finite set $\mathcal{E}^k \subseteq \mathcal{E}$ with $|\mathcal{E}^k| = k$

$$\rho_{\mathcal{E}}^k(C) = C \sqcup E_{i_1} \sqcup \dots \sqcup E_{i_k}, \forall i_j, E_{i_j} \in \mathcal{E}^k \text{ and } E_{i_j} \sqcap C \sqsubseteq \perp$$

Extensivity of this operator follows directly from the definition. However, exhaustivity is not necessarily satisfied unless

the exception set includes the $\top$ concept or the disjunction of some or all of its elements entails the $\top$ concept.

If we consider again Example 1, a relaxation of the formula $\text{BIRD} \sqsubseteq \text{FLIES}$ using the operator $\rho_{\mathcal{E}}^k$ over the concept FLIES with the exception set $\mathcal{E} = \{\text{TWEETY}\}$ results in the formula $\text{BIRD} \sqsubseteq \text{FLIES} \sqcup \text{TWEETY}$. The new revised knowledge base is then $\{\text{TWEETY} \sqsubseteq \text{BIRD}, \text{BIRD} \sqsubseteq \text{FLIES} \sqcup \text{TWEETY}, \text{TWEETY} \sqcap \text{FLIES} \sqsubseteq \perp\}$ which is consistent.

Another example involving this relaxation will be discussed in the $\mathcal{ALC}$ case (cf. Example 3).

4.3 Relaxation and retraction in $\mathcal{ALC}$

We consider here operators suited to $\mathcal{ALC}$ language. Of course, all the operators defined for $\mathcal{EL}$ and $\mathcal{ELU}$ remain valid.

$\mathcal{ALC}$ -Concept Retractions. A first possibility for defining retraction is to remove iteratively from an $\mathcal{ALC}$ -concept description one or a set of its subconcepts. A similar construction has been introduced in [Qi et al., 2006b] by transforming Abox assertions to nominals and conjuncting their negations from the concept they belong to. Interestingly enough, almost all the operators defined in [Qi et al., 2006b; Gorogiannis and Hunter, 2008] are relaxations.

Definition 12 Let C be any $\mathcal{ALC}$ -concept description, we define $\kappa_{\mathcal{E}}^n(C) = C \sqcap E_1^c \sqcap \dots \sqcap E_n^c$ s.t. $E_1 \sqsubseteq C, \dots, E_n \sqsubseteq C$.

Consider again Example 1. $\kappa_{\mathcal{E}}^1(\text{BIRD}) = \text{BIRD} \sqcap \text{TWEETY}^c$. The resulting revised knowledge base is then $\{\text{TWEETY} \sqsubseteq \text{BIRD}, \text{BIRD} \sqcap \text{TWEETY}^c \sqsubseteq \text{FLIES}, \text{TWEETY} \sqcap \text{FLIES} \sqsubseteq \perp\}$ which is consistent.

Another possibility, suggested in [Gorogiannis and Hunter, 2008] and related to operators defined in propositional logic as introduced in [Bloch and Lang, 2002], consists in applying the retraction at the atomic level. This captures somehow the Dalal's idea of revision operators in propositional logic [Dalal, 1988].

Definition 13 Let C be an $\mathcal{ALC}$ -concept description of the form $Q_1 r_1 \dots Q_m r_m. D$, where Q_i is a quantifier and D is quantifier-free and in CNF form, i.e. $D = E_1 \sqcap E_2 \sqcap \dots \sqcap E_n$ with E_i being disjunctions of possibly negated atomic concepts. Define, as in the propositional case [Bloch and Lang, 2002], $\kappa_p(D) = \bigcap_{j=1}^n (\bigcup_{i \neq j} E_i)$. Then $\kappa_{\text{Dalal}}^n(C) = Q_1 r_1 \dots Q_m r_m. \kappa_p^n(D)$.

This idea can be generalized to consider any retraction defined in $\mathcal{ELU}$.

Definition 14 Let C be an $\mathcal{ALC}$ -concept description of the form $Q_1 r_1 \dots Q_m r_m. D$, where Q_i is a quantifier and D is a quantifier-free. Then $\kappa_{\cap}^n(C) = Q_1 r_1 \dots Q_m r_m. \kappa_{\cap}^n(D)$.

Another possible $\mathcal{ALC}$ -concept description retraction is obtained by substituting the existential restriction by an universal one. This idea has been sketched in [Gorogiannis and Hunter, 2008] for defining dilation operators (then by transforming $\forall$ into $\exists$), i.e. special relaxation operators enjoying additional properties [Distel *et al.*, 2014b; Distel *et al.*, 2014b]. We adapt it here to define retraction in DL syntax.

Definition 15 Let C be an $\mathcal{ALC}$ -concept description of the form $Q_1 r_1 \cdots Q_n r_n . D$, where Q_i is a quantifier and D is quantifier-free, then

$$\kappa_q(C) = \bigcap \{Q'_1 r_1 \cdots Q'_n r_n . D \mid \exists j \leq n \text{ s.t. } Q_j = \exists \text{ and } Q'_j = \forall, \text{ and for all } i \leq n \text{ s.t. } i \neq j, Q'_i = Q_i\}$$

$\mathcal{ALC}$ -Concept Relaxations. Let us now introduce some relaxation operators suited to $\mathcal{ALC}$ language.

Definition 16 Let C be an $\mathcal{ALC}$ -concept description of the form $Q_1 r_1 \cdots Q_m r_m . D$, where Q_i is a quantifier and D is quantifier-free and in DNF form, i.e. $D = E_1 \sqcup E_2 \sqcup \cdots E_n$ with E_i being conjunction of possibly negated atomic concepts. Define, as in the propositional case [Bloch and Lang, 2002], $\rho_p(D) = \bigsqcup_{j=1}^n (\bigcap_{i \neq j} E_i)$, then $\rho_{\text{Dalal}}^n(C) = Q_1 r_1 \cdots Q_m r_m . \rho_p^n(D)$.

As for retraction, this idea can be generalized to consider any relaxation defined in $\mathcal{ELU}$.

Definition 17 Let C be an $\mathcal{ALC}$ -concept description of the form $Q_1 r_1 \cdots Q_n r_n . D$, where Q_i is a quantifier and D is quantifier-free, then $\rho_{\mathcal{E}}^n(C) = Q_1 r_1 \cdots Q_n r_n . \rho_{\mathcal{E}}^n(D)$.

Let us consider another example adapted from the literature to illustrate these operators [Qi *et al.*, 2006b].

Example 3 Let us consider the following knowledge bases: $T = \{\text{BOB} \sqsubseteq \forall \text{HASCHILD.RICH}, \text{BOB} \sqsubseteq \exists \text{HASCHILD.MARY}, \text{MARY} \sqsubseteq \text{RICH}\}$ and $T' = \{\text{BOB} \sqsubseteq \text{HASCHILD.JOHN}, \text{JOHN} \sqsubseteq \text{RICH}^c\}$. Relaxing the formula $\text{BOB} \sqsubseteq \forall \text{HASCHILD.RICH}$ by applying $\rho_{\mathcal{E}}^n$ to the concept on the right hand side results in the following formula $\text{BOB} \sqsubseteq \forall \text{HASCHILD} . (\text{RICH} \sqcup \text{JOHN})$ which resolves the conflict between the two knowledge bases.

A last possibility, dual to the retraction operator given in Definition 15, consists in transforming universal quantifiers to existential ones.

Definition 18 Let C be an $\mathcal{ALC}$ -concept description of the form $Q_1 r_1 \cdots Q_n r_n . D$, where Q_i is a quantifier and D is quantifier-free, then

$$\rho_q(C) = \bigcup \{Q'_1 r_1 \cdots Q'_n r_n . D \mid \exists j \leq n \text{ s.t. } Q_j = \forall \text{ and } Q'_j = \exists, \text{ and for all } i \leq n \text{ s.t. } i \neq j, Q'_i = Q_i\}$$

If we consider again Example 3, relaxing the formula $\text{BOB} \sqsubseteq \forall \text{HASCHILD.RICH}$ by applying ρ_q to the concept on the right hand

side results in the following formula $\text{BOB} \sqsubseteq \exists \text{HASCHILD.RICH}$, which resolves the conflict between the two knowledge bases.

The following proposition summarizes the properties of the introduced operators.

Proposition 5 The operators $\rho_{\top}, \rho_{\text{depth}}, \rho_{\text{leaves}}, \rho_e, \rho_{\text{Dalal}}, \rho_q$ are extensive and exhaustive. The operators $\rho_{\mathcal{E}}, \rho_{\sqcup}$ are extensive but not exhaustive. The operators $\kappa_{\perp}, \kappa_{\mathcal{E}}, \kappa_{\text{Dalal}}, \kappa_{\sqcap}$ are anti-extensive and exhaustive. The operators κ_q is anti-extensive but not exhaustive.

These properties are directly derived from the definitions and from properties of ρ_p and κ_p detailed in [Bloch and Lang, 2002]. Note that for κ_q exhaustivity can be obtained by further removing recursively the remaining universal quantifiers and apply at the final step any retraction defined above on the concept D .

5 Related works

In the last decade, several works have studied revision operators in Description Logics. While most of them concentrated on the adaptation of AGM theory, few works have concerned the definition of concrete operators [Meyer *et al.*, 2005; Qi *et al.*, 2006a; Qi *et al.*, 2006b]. A closely related field is inconsistency handling in ontologies (e.g. [Schlobach and Cornet, 2003; Schlobach *et al.*, 2007]), with the main difference that the rationality of inconsistency repairing operators is not investigated, as suggested by AGM theory.

Some of our relaxation operators are closely related to the ones introduced in [Qi *et al.*, 2006b] for knowledge bases revision and in [Gorogiannis and Hunter, 2008] for merging first-order theories. Our relaxation-based revision framework, being abstract enough (i.e. defined through easily satisfied properties), encompasses these operators. Moreover, the revision operator defined in [Qi *et al.*, 2006b] considers only inconsistencies due to Abox assertions. Our operators are general in the sense that Abox assertions are handled as any formula of the language.

The relaxation idea originates from the work on MorphoLogics, initially introduced in [Bloch and Lang, 2002; Bloch *et al.*, 2004]. In this seminal work, revision operators (and explanatory relations) were defined through dilation and erosion operators. These operators share some similarities with relaxation and retraction as defined in this paper. Dilation is a sup-preserving operator and erosion is inf-preserving, hence both are increasing. Some particular dilations and erosions are exhaustive and extensive while relaxation and retraction operators are defined to be exhaustive and extensive but not necessarily sup- and inf-preserving.

Another contribution in this paper concerns the generalization of AGM postulates and their translation in a model-theoretic writing with a definition of inconsistency, allowing using them in a wide class of non-classical logics. This follows recent works on the adaptation of AGM theory (e.g. [Ribeiro *et al.*, 2013; Ribeiro and Wassermann, 2014; Delgrande and Peppas, 2015; Flouris *et al.*, 2005]). Our generalization is closely related to the one recently introduced in [Ribeiro and Wassermann, 2014] and could be seen as its

counterpart in a model-theoretic setting. It also extends the one introduced in [Qi *et al.*, 2006b].

6 Conclusion

The contribution of this paper is threefold. First, we provided a generalization of AGM postulates so as they become applicable to a wide class of non-classical logics. Secondly we proposed a general framework for defining revision operators based on the notion of relaxation. We demonstrated that such a relaxation-based framework for belief revision satisfies the AGM postulates and leads to a faithful assignment. Thirdly, we introduced a bunch of concrete relaxations, discussed their properties and illustrated them through simple examples. Future work will concern the study of the complexity of these operators, the comparison of their induced ordering, and their generalization to other non-classical logics such as Horn logic.

Acknowledgments. This work was partially funded by the French ANR project LOGIMA.

References

- [Aiguier *et al.*, 2015] M. Aiguier, J. Atif, I. Bloch, and C. Hudelot. Belief revision in institutions: A relaxation-based approach. *CoRR*, abs/1502.02298, 2015.
- [Alchourrón *et al.*, 1985] C. E. Alchourrón, P. Gärdenfors, and D. Makinson. On the Logic of Theory Change: Partial Meet Contraction and Revision Functions. *Journal of Symbolic Logic*, 50:510–530, 1985.
- [Baader *et al.*, 1999] F. Baader, R. Küsters, and R. Molitor. Computing least common subsumers in description logics with existential restrictions. In *IJCAI’99*, pages 96–101. Morgan-Kaufmann, 1999.
- [Baader, 2003] F. Baader. Description Logic terminology. In F. Baader, D. Calvanese, D. McGuinness, D. Nardi, and P. F. Patel-Schneider, editors, *The Description Logic Handbook: Theory, Implementation, and Applications*, pages 485–495. Cambridge University Press, 2003.
- [Bloch and Lang, 2002] I. Bloch and J. Lang. Towards Mathematical Morpho-Logics. In B. Bouchon-Meunier, J. Gutierrez-Rios, L. Magdalena, and R. Yager, editors, *Technologies for Constructing Intelligent Systems*, pages 367–380. Springer, 2002.
- [Bloch *et al.*, 2004] I. Bloch, R. Pino-Pérez, and C. Uzcategui. A Unified Treatment of Knowledge Dynamics. In *International Conference on the Principles of Knowledge Representation and Reasoning, KR2004*, pages 329–337, Canada, 2004.
- [Dalal, 1988] M. Dalal. Investigations into a Theory of Knowledge Base Revision: Preliminary Report. In *AAAI’88*, pages 475–479, 1988.
- [Delgrande and Peppas, 2015] J. P. Delgrande and P. Peppas. Belief revision in Horn theories. *Artificial Intelligence*, 218:1–22, 2015.
- [Distel *et al.*, 2014a] F. Distel, J. Atif, and I. Bloch. Concept dissimilarity based on tree edit distance and morphological dilation. Technical Report 2014D001, Telecom ParisTech - CNRS LTCI, February 2014.
- [Distel *et al.*, 2014b] F. Distel, J. Atif, and I. Bloch. Concept dissimilarity based on tree edit distance and morphological dilations. In *European Conference on Artificial Intelligence (ECAI)*, pages 249–254, Prag, Czech Republic, 2014.
- [Distel *et al.*, 2014c] F. Distel, J. Atif, and I. Bloch. Concept dissimilarity with triangle inequality. In *14th International Conference on Principles of Knowledge Representation and Reasoning*, pages 614–617, Wien, Austria, July 2014.
- [Flouris *et al.*, 2005] G. Flouris, D. Plexousakis, and G. Antoniou. On applying the AGM theory to DLs and OWL. In *The Semantic Web–ISWC 2005*, pages 216–231. Springer, 2005.
- [Flouris *et al.*, 2006] G. Flouris, Z. Huang, J. Pan, D. Plexousakis, and H. Wache. Inconsistencies, negations and changes in ontologies. In *21st AAAI National Conference on Artificial Intelligence*, pages 1295–1300, 2006.
- [Gärdenfors, 2003] P. Gärdenfors. *Belief revision*, volume 29. Cambridge University Press, 2003.
- [Gorogiannis and Hunter, 2008] N. Gorogiannis and A. Hunter. Merging First-Order Knowledge using Dilation Operators. In *Fifth International Symposium on Foundations of Information and Knowledge Systems, FoIKS’08*, volume LNCS 4932, pages 132–150, January 2008.
- [Grove, 1988] A. Grove. Two modellings for theory change. *Journal of philosophical logic*, 17(2):157–170, 1988.
- [Katsuno and Mendelzon, 1991] H. Katsuno and A. O. Mendelzon. Propositional Knowledge Base Revision and Minimal Change. *Artificial Intelligence*, 52:263–294, 1991.
- [Meyer *et al.*, 2005] T. Meyer, K. Lee, and R. Booth. Knowledge integration for description logics. In *AAAI*, volume 5, pages 645–650, 2005.
- [Qi *et al.*, 2006a] G. Qi, W. Liu, and D. Bell. A revision-based approach to handling inconsistency in description logics. *Artificial Intelligence Review*, 26(1-2):115–128, 2006.
- [Qi *et al.*, 2006b] G. Qi, W. Liu, and D. A. Bell. Knowledge base revision in description logics. In *Logics in Artificial Intelligence*, volume LNAI 4160, pages 386–398, 2006.
- [Ribeiro and Wassermann, 2014] M. M. Ribeiro and R. Wassermann. Minimal change in AGM revision for non-classical logics. In *International Conference on Principles of Knowledge Representation and Reasoning (KR’14)*, pages 657–660, 2014.
- [Ribeiro *et al.*, 2013] M. M. Ribeiro, R. Wassermann, G. Flouris, and G. Antoniou. Minimal change: Relevance and recovery revisited. *Artificial Intelligence*, 201:59–80, 2013.

- [Schlobach and Cornet, 2003] S. Schlobach and R. Cornet. Non-standard reasoning services for the debugging of description logic terminologies. In *IJCAI*, volume 3, pages 355–362, 2003.
- [Schlobach *et al.*, 2007] S. Schlobach, Z. Huang, R. Cornet, and F. Van Harmelen. Debugging incoherent terminologies. *Journal of Automated Reasoning*, 39(3):317–349, 2007.